



PepperBall®



REFILL GUIDE

WARNING: THIS PRODUCT IS NOT A TOY. KEEP AWAY FROM CHILDREN. Read label carefully before opening this container or using any of its contents. Opening container indicates user has carefully read this label in its entirety and accepts its provisions as the terms and conditions under which this product is furnished.

THIS PRODUCT IS INTENDED SOLELY for use by properly trained users including law enforcement, military, private security, and corrections personnel. This BLAST™ refill barrel is preloaded with specially formulated powder. The active ingredient in the LIVE-X payload is PAVA, a pepper powder that on exposure or inhalation, will cause coughing, burning, stinging and/or other physical irritation. The INERT payload has no active ingredient and is intended for training purposes only.

WARNING: This product may contain one or more chemicals that are known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands after handling.


WARNING:

N₂ Gas Contents Under Pressure.
Do not puncture or incinerate container.
Do not heat or store at temperature above 120° F.
Do not expose cylinder to corrosive materials.
Keep out of the reach of children.




PRE-FILLED BARREL AND N₂ CARTRIDGE REPLACEMENT.
DO NOT ATTEMPT TO RELOAD IF YOUR BLAST HAS NOT BEEN PREVIOUSLY DISCHARGED. DOING SO COULD CAUSE AN UNPLANNED DISCHARGE.

1

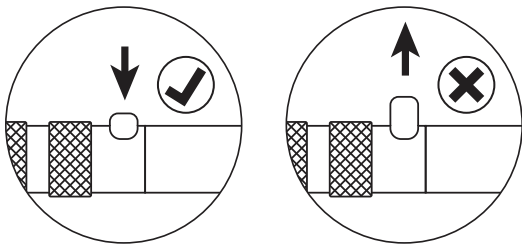


Make sure BLAST™ has been discharged. To check if the unit has been discharged, see that the trigger is permanently depressed, causing the safety to no longer work. This means the unit is ready to be reloaded.

2

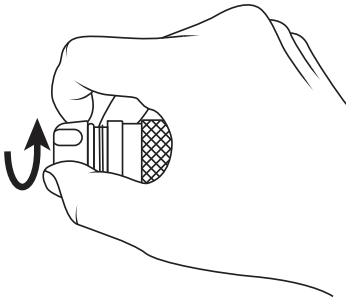


Remove end cap by twisting counter clockwise. You can also use the included 5/16th Allen Tool.

3

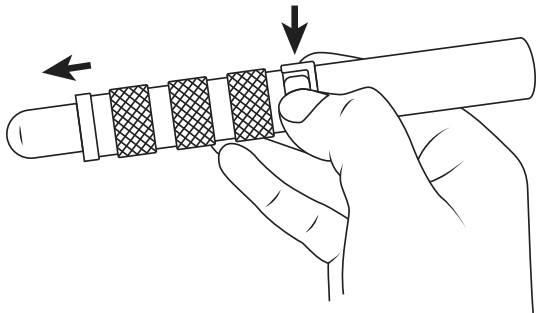


Press the trigger while pointing the open ended side of the grip (opposite of barrel cartridge) down. The N2 cartridge will fall out.

4

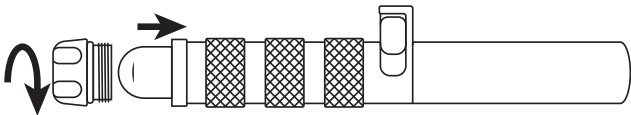


Ensure safety is in SAFE mode and insert new N2 cartridge.
Tighten end cap by turning clockwise.

5

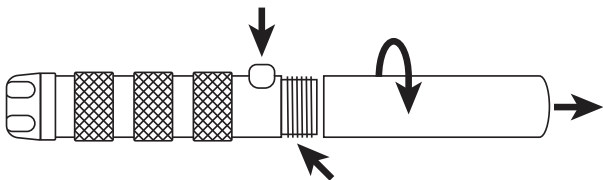


Remove barrel by turning counterclockwise. Clean the grip threads with a clean rag.

6

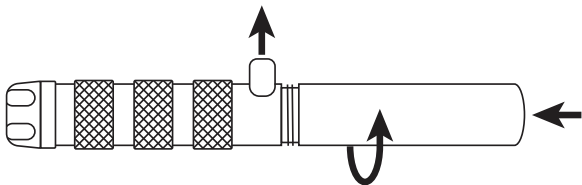

Install new barrel turning clockwise.

7

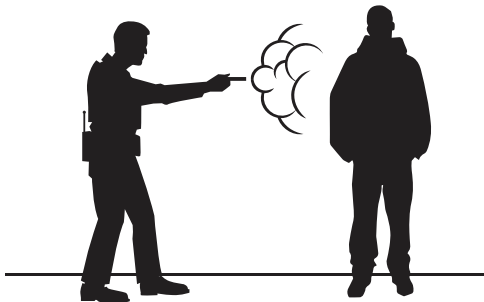

READY TO SHOOT! Point towards target that is within a 1 to 10 foot standoff distance.

WARRANTY:

Five years from date of purchase when stored in a cool, dry environment in original, unopened packaging. One year from date of opening, provided the product is protected from prolonged heat and direct sunlight.



PepperBall® A Division of United Tactical Systems, LLC
28101 Ballard Drive, Suite F
Lake Forest, IL 60045
PepperBall.com | (877) 887-3773